



Where Materials Flow by Design

Lean Material Flow Solutions

ProFlow™ Series

# Flat Deck TrakSteer™ Carts

1350 Rockefeller Rd., Wickliffe, OH 44092, PH 440.943.4111, info@KtecInc.com, www.KtecInc.com

## FLAT DECK TrakSteer™ CARTS

K-Tec flat deck TrakSteer™ carts deliver flexibility and top quality to complement **lean material flow** programs. Features include:

- 4 Wheel Linked Caster Style Steering
- Low 11" Deck Heights
- Self Stowing Articulated HD Towbar
- Choice of Two (2) Popular Deck Sizes
- No-Trip Recessed Auto Hitch, HD Floor Lock
- One Piece Formed Steel Deck, 2,000 lb. Cap.

## INDUSTRY LEADING DESIGN

Carts meet standard ergonomic limits for manual push/pull forces with heavy payloads and standup to tough loading conditions. FEA (finite element analysis) puts stiffness and weight where needed to produce carts as

light and rugged as possible. Numerous "attention to detail" features help K-Tec meet rigorous **safety**, reliability and durability standards. K-Tec ProFlow™ Series carts carry a **two (2) year warranty**.<sup>1</sup>

## COMMITMENT TO SUCCESS

K-Tec identifies and benchmarks relevant applications, addresses ergo/safety issues and provides on-site feasibility reviews where required. Application engineers are available by conference call or direct appointment to help walk through the early planning and front end design phase of lean material flow projects.<sup>2</sup> K-Tec also designs ergo-support products such as lifts and conveyors to provide an integrated, dependable solution. A "try before you buy" **demo program** for qualified customers delivers a hands on look at a possible solution without wasting investment dollars.



Model Shown: KT2-49NRTS



Model Shown: KT2-49NRTS




1. See web site for warranty detail. 2. May be subject to consulting charges.

**Distributed By:**

# Lean Material Flow Solutions

# Flat Deck Carts

1350 Rockefeller Rd., Wickliffe, OH 44092, PH 440.943.4111, info@Kteclnc.com, www.Kteclnc.com

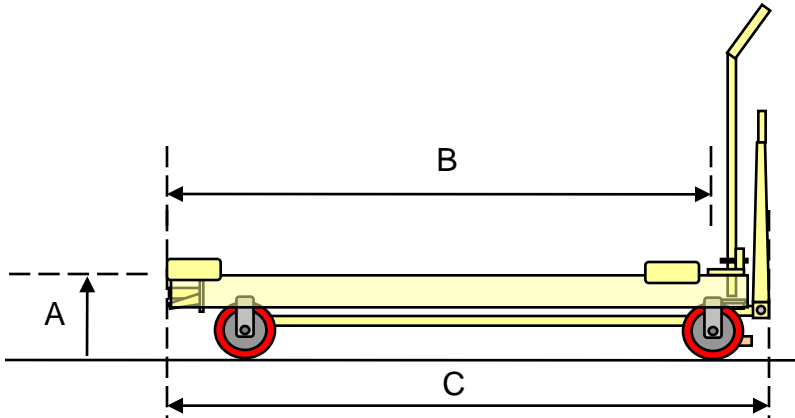

### Flat Deck *TrakSteer* Carts

**Model: KT2-37NRTS**

**Model: KT2-49NRTS**

Dimensions		
Floor to Deck Height, A	11"	11"
Usable Deck Size, B	37.5" x 46"	49.5" x 58.5"
Overall Cart Length, C	55.5"	67"
Overall Cart Width, D	38.5"	50.5"
<b>Standard Features**</b>		
4-Wheel Caster Link Steer w/Kingpinless Swivels	✓	✓
6-Wheel Caster Steer w/Kingpinless Swivels, Hybrid Low Push/Pull Force (FOR RAMP USE CONSULT FACTORY)		
Formed & Welded One Piece Steel Frame w/Powder Paint Finish	✓	✓
Built-in Lift Pocket Fits 7" x 24" x 38" Pneumatic or Hydraulic Lifts		
Rotational Upper Deck w/Soft Detents at 90 <sup>o</sup> and Auto-Lock (towbar activated)		
Precision Sealed Wheel and Swivel (rotational deck if applicable) Bearings	✓	✓
"Operator No-Bend" Heavy-Duty Auto-Hitch and Self Stowing, Reinforced Towbar	✓	✓
Heavy Duty Floor Lock w/Replacable Friction Pads	✓	✓
MPP™ (modified pivot point) Caster Steering (FOR RAMP USE CONSULT FACTORY)		
Cart Tare Weight	293 lbs.	410lbs.
Deck Load Capacity	2000 lbs.	2000 lbs.

Application photos, technical specifications and CAD drawings can be found on the web site at [www.Kteclnc.com](http://www.Kteclnc.com)